

**ROCKCRETE EQUIPMENT'S**

**ROCKCRETER 360° HIGH SPEED SPINNING NOZZLE**



Solutions for ore pass lining and shaft lining



**ROCKCRETE**  
EQUIPMENT (PTY) LTD

# Model SPN


The model SPN is a high speed, rotating nozzle for applying grout, epoxy, mortar and wet shotcrete mixes.

Lining diameters can range from 150mm to 3.5M. Linings can range from 10mm to 50mm thick and aggregates up to 8mm. Output depends on size of pump and nozzle being used. The spraying head is powered by its own air motor which is controlled by the operator.

Various capacity nozzles are available. 3/4", 1", 1-1/2" and 2" diameter.

## Applications

- ☞ Ore Pass Linings
- ☞ Pipe Linings
- ☞ Chimney Linings
- ☞ Ladles
- ☞ Tunnels
- ☞ Shafts

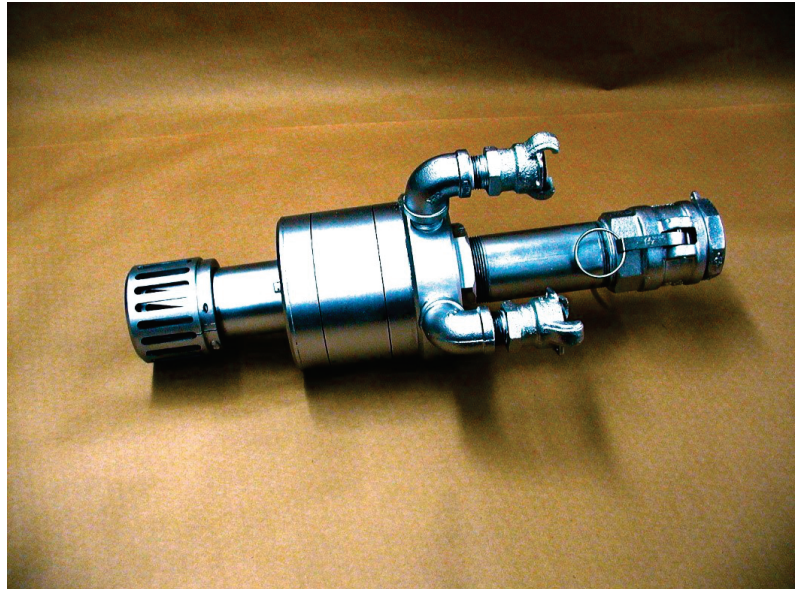

**RE** **ROCKCRETE**  
EQUIPMENT (PTY) LTD

Rockcrete Equipment (PTY) LTD  
361 Crocker Road  
Wadeville, Germiston 1428

Phone: +27 11 865 3019  
Email: [information@rockcrete.co.za](mailto:information@rockcrete.co.za)  
[www.rockcrete.co.za](http://www.rockcrete.co.za)